

## COMMERCIAL FAN-FORCED WALL HEATERS

# CWH3000 SERIES



### CONTEMPORARY DESIGN

- Commercial grade steel grille designed to provide comfort through optimized airflow

### UNIFORM DISTRIBUTION OF WARMTH

- Built-in fan delay switch energizes fan motor only after elements are heated, which prevents discharge of unheated air
- Fan only operation for summer use
- Integral double pole thermostat allows for easy adjustment of room temperature to maintain desired comfort level

### SAFETY STANDARDS COMPLIANT

- Safety Listed by Intertek (ETL) for use in the USA and Canada complying with ANSI/UL2021 and C22.2, NO. 56 Safety Standards
- Manual reset thermal overheat protector disconnects power in the event of overheating due to accidental blockage

### DURABILITY AND EASY MAINTENANCE


- All units have a permanently lubricated totally enclosed fan motor, which creates long life and low maintenance, and gently distributes warmth throughout the area
- Built-in power disconnect switch for added safety during maintenance

## APPLICATIONS:

Attics  
Basements  
Entryways  
Large Rooms  
Offices  
Remodels

Catalog Number	Voltage	Phase	Watts	Amps
CWH3150F	120	1	1500	12.5
CWH3180F	120	1	1800	15.0
CWH3404F	240	1	4000/2000	16.7/8.3
	208		3000/1500	14.5/7.2
CWH3407F	277	1	4000/2000	14.5/7.2
	240		3000/1500	12.5/6.3
CWH3307F	277	1	3000/1500	10.8/5.4
CWH3408F	208	1	4000/2000	19.2/9.6
CWH34083F	208	3	4000	11.1
CWH34043F	240	3	4000	9.7
CWH3504F	240/208	1	4800/3600	20.0/17.3
CWH3507F	277/240	1	4800/3600	17.3/15.0
CWH3508F	208	1	4800	23.1
CWH35083F	208	3	4800	13.4
CWH35043F	240	3	4800	11.6
CWH3203F	347	1	2000	5.8
CWH3206F	600	1	2000	3.3
CWH3153F	347	1	1500	4.3
CWH3156F	600	1	1500	2.5
CWH3303F	347	1	3000	8.6
CWH3306F	600	1	3000	5
CWH3403F	347	1	4000	11.5
CWH3406F	600	1	4000	6.7
CWH3503F	347	1	4800	13.8
CWH3506F	600	1	4800	8
Accessories				
CWH3SM	Surface mounting frame in northern white			
CWH3S1	1" Semi-recessed frame in northern white			
CWH3S2	2" Semi-recessed frame in northern white			
LFKSFCNW	Tamper-resistant front cover in northern white			
FRAFCTPF	Tamper-proof front cover in northern white			

## DIMENSIONS

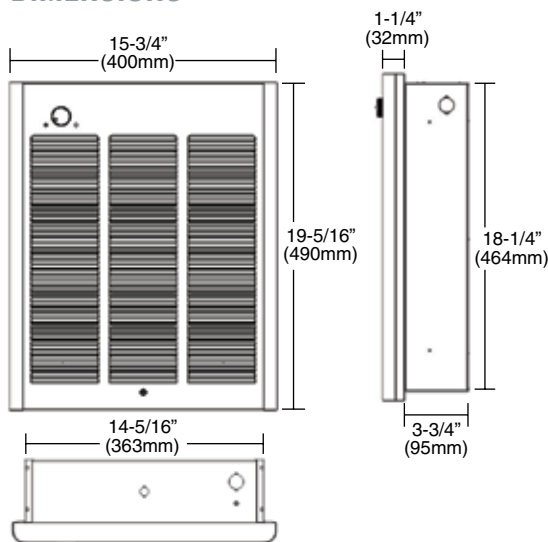

## MOUNTING LIMITATIONS

Do not install heater closer than 8" from floor or adjacent wall surface, behind towel rack or door, upside down or side up, in floor, ceiling or closet.

